

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2001-044044

(43)Date of publication of application : 16.02.2001

(51)Int.Cl.

H01F 27/06

H01F 27/28

H01F 37/00

H01F 41/10

// H01B 7/02

(21)Application number : 11-241984

(71)Applicant : CONCORDE DENSHI KOGYO:KK

(22)Date of filing : 26.07.1999


(72)Inventor : SHIBAZAKI HIROSHI

(54) SURFACE-MOUNTING INDUCTOR

(57)Abstract:

PROBLEM TO BE SOLVED: To reduce the number of manufacturing steps and improve reliability by easily forming a closed magnetic loop type coil having a large current capacity, eliminating the complicated sealing work due to the resin injection, and simplifying a case molding process without the use of a lead terminal embedding case and also eliminating the process to connect a coil terminal to a lead terminal of the case using solder.

SOLUTION: A closed magnetic path core is formed by embedding a coil that is formed by winding an insulator-covered flat angular wire around the recessed portions of a couple of magnetic cores, formed of a ferrite material with inclusion of an annular recessed portion at the center and a terminal guiding groove 6 at the side wall. Next, the insulator cover of coil terminal portion is removed and is soldered. Thereafter, a substrate mounting terminal 9 is formed, by continuously folding the wire at the bottom surface of the external circumference portion and two side surfaces.

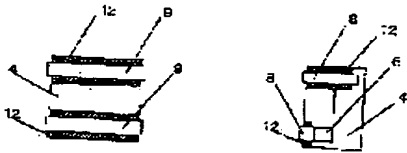

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]